



Copyright 1999-2001 FlyteComm Inc. All rights reserved.



USERS MANUAL

FlyteTrax™ Express

Table of Contents

1. INTRODUCTION TO REALTIME FLIGHT TRACKER AND FLIGHT STATUS DATA.....	5
1.1 THE ORIGIN OF THE FLIGHT TRACKER AND FLIGHT STATUS DATA.....	5
1.2 HOW THE DATA GETS TO YOU.....	5
1.3 THE FLYTETRAX™ EXPRESS SYSTEM	5
2. GETTING STARTED WITH YOUR FLYTECOMM SYSTEM.....	7
2.1 SYSTEM REQUIREMENTS	7
2.2 COMMUNICATIONS REQUIREMENTS	8
2.3 BEFORE YOU BEGIN	8
2.4 STARTING FLYTETRAX™ EXPRESS.....	9
2.5 ENABLING NETWORKING.....	9
THE FLYTETRAX™ EXPRESS DISPLAY	10
3. NAVIGATING AROUND THE DISPLAY.....	11
3.1 ZOOM IN, ZOOM OUT, AND MOVE TO	11
3.2 VIEWPOINTS	11
3.3 MAP PROJECTIONS	12
3.4 HOT KEYS	12
3.5 CHANGING FONTS.....	13
3.6 DISPLAYING THE TOOL BAR AND STATUS BAR.....	13
3.7 DISPLAY FLIGHT TRACKER AND FLIGHT STATUS DATA	13
3.8 DISPLAY OVERLAYS	14
3.9 RANGE RINGS.....	15
4. WORKING WITH DATA TAGS.....	16
4.1 DISPLAYING DATA TAGS.....	16
4.2 MODIFYING DATA TAGS.....	16
4.3 ADDING COMMENTS TO DATA TAGS.....	17
4.4 DISPLAYING AN AIRCRAFTS LAST REPORTED POSITION	17
5. WORKING WITH FLIGHTS	18
5.1 USING THE FLIGHT TRACKER AND FLIGHT STATUS NOTIFICATION SYSTEM.....	18

5.2	USING THE FLIGHT TRACKER AND FLIGHT STATUS HISTORY FEATURE.....	18
5.3	FINDING FLIGHTS	19
5.4	DISPLAYING AN AIRCRAFT'S ROUTE OF FLIGHT TRACKER AND FLIGHT STATUS 19	
5.5	LOOKING UP NAMES AND IDENTIFIERS	19
6.	WORKING WITH FILTERS	20
6.1	CREATING FILTERS	20
	NOTES.....	20
6.2	MODIFYING FILTERS.....	21
6.3	SAVING FILTERS.....	21
6.4	DELETING FILTERS	21
6.5	CLEARING FILTERS	21
6.6	USING MULTIPLE FILTERS AT THE SAME TIME	21
6.7	ADDING NEW AIRPORTS, OPERATOR CODES, AND AIRCRAFT TYPES.....	22
7.	WORKING WITH LISTS.....	23
7.1	CREATING LISTS.....	23
7.2	MODIFYING LISTS.....	23
7.3	SAVING LISTS.....	23
7.4	DELETING LISTS	23
7.5	MODIFYING AN EXISTING LIST	24
7.6	OPENING AN EXISTING LIST	24
8.	USING THE WEATHER	25
8.1	DISPLAYING THE NATIONAL RADAR MOSAIC OVERLAY.....	25
8.2	VIEWING ASSIGNED RADAR MOSAIC COLORS.....	25
8.3	DISPLAYING THE NATIONAL SATELLITE CLOUD COVER OVERLAY.....	25
8.4	USING THE RADAR MOSAIC WEATHER ALERTING SYSTEM.....	26
9.	WORKING WITH LOGS	27
9.1	LOGGING AIRPORT ACTIVITY	27
9.2	LOGGING AIRCRAFT ACTIVITY	27
9.3	OPENING LOG FILES.....	28
10.	DISPLAYING TEXT INFORMATION	29
10.1	FLIGHT TRACKER AND FLIGHT STATUS DISPLAY LIST.....	29
10.2	AIRPORT ARRIVAL INFORMATION DISPLAY	29

11. PRINTING	30
11.1 PRINTING THE GRAPHIC DISPLAY	30
11.2 PRINTING TEXTUAL INFORMATION.....	30
12. SAVING AND PLAYING BACK DATA	30
12.1 ENABLING FILE COLLECTION IN THE FLIGHT TRACKER AND FLIGHT STATUS TABLE MANAGER (FTM2001)	30
12.2 PLAYING BACK DATA USING FLYTETRAX 2001™	31
13. USING THE TAILNUMBER ALIAS FEATURE	32
13.1 ADDING TAILNUMBERS.....	32
13.2 EDITING TAILNUMBERS.....	32
13.3 DELETING TAILNUMBERS.....	32

1. INTRODUCTION TO REALTIME FLIGHT TRACKER AND FLIGHT STATUS DATA

1.1 THE ORIGIN OF THE FLIGHT TRACKER AND FLIGHT STATUS DATA

In the air traffic environment, aircraft operate under either Visual Flight tracker and flight status Rules (VFR) or Instrument Flight tracker and flight status Rules (IFR). Aircraft flying using VFR are required to keep their distance from other aircraft using the see and be seen principles, much the same way you avoid hitting another car on the road by seeing and avoiding it. Aircraft using instrument flight tracker and flight status rules IFR are required to be under the control of an air traffic controller who will separate him from other aircraft. The air traffic controller does this through the use of radar.

Air traffic control is divided into two basic functions. These are, terminal air traffic control and enroute air traffic control. Terminal air traffic control operates in the airspace surrounding the airport. Usually it is a 40-mile radius around the airport from the ground up to between 6000 to 12001 feet, depending on the location. Enroute air traffic control operates in the entire remaining airspace from 700 feet above the surface up to 60,000 feet within the continental United States. Twenty Air Route Traffic Control Centers (ARTCC) across the country control this airspace. Each ARTCC has automated communications capability with each of the Terminal air traffic facilities within its boundaries as well as automated communications with each of the ARTCCs that surround it. When an aircraft flies across the country IFR, data is passed from one air traffic facility to another with the status of the flight tracker and flight status and its progress toward its destination. These data messages are called Flight tracker and flight status Movement Messages and are the same messages that are passed to the FlyteTrax™ Express system for processing and display on your computer.

1.2 HOW THE DATA GETS TO YOU

Data from the air traffic control system flows into the FlyteComm data servers. There the data is routed to customers connected via the Internet. Customers connect to the data by dialing up their Internet Service Provider, such as AOL, Earthlink, or one of the other on-line services. Some customers may have high speed data connections such as DSL, IDSL, or T-1 connections, which gives them internet access continually. Once connected to the Internet, start the FlyteTrax™ Express. When FlyteTrax™ Express starts, it connects to the FlyteComm server through the Internet and begins receiving the current database of air traffic activity. Once the complete database is downloaded, each movement message is passed to the FlyteTrax™ Express program as soon as it is passed within the air traffic system.

Customers may elect to receive weather information with their flight tracker and flight status data. This weather will consist of a national radar mosaic with 1 kilometer resolution and 48 colors. The 48 colors represent 16 colors of liquid precipitation or rain, 16 colors of mixed precipitation, and 16 colors of solid precipitation (snow or ice). The radar mosaic is updated every 15 minutes, beginning 5 minutes past the hour. The satellite cloud cover imagery is also provided. This image is 1 kilometer by 1 kilometer in resolution and is updated hourly. The image is received on the half hour for the current hour. The half hour delay in receiving the image is due to the processing time necessary by DTN/Kavouras

1.3 THE FLYTETRAX™ EXPRESS SYSTEM

The FlyteTrax™ Express system is capable of running on a computer with Windows 95, Windows 98, or Windows NT operating system. Other Unix based operating systems can be supported at a minimal setup charge. The FlyteTrax™ consists of two primary functions. The two functions are Flight tracker and flight status Table Manager (FTM 2001™) and the FlyteTrax™ Express Display (TRAX).

The FTM 2001 receives the individual flight tracker and flight status movement messages and checks to assure that they are valid and complete. Once validated, the database is searched to find the flight tracker and flight status to which the message pertains. Once the flight tracker and flight status is found, the message elements update the status or position of the flight tracker and flight status and the next message is retrieved. If a flight tracker and flight status cannot be found for a message, the message is used to build a new flight tracker and flight status record. As other messages arrive pertaining to this new flight tracker and flight status, the information is stored in the flight tracker and flight status record. Once each minute the entire database is searched and each flight tracker and flight status's position is updated with its currently calculated position. Then all flights are written to two files: the .map and .rte file. These files are then used by the FlyteTrax™ Express Display to geographically display the location of each aircraft and allow the user to call up any aspect of the flight tracker and flight status they want displayed.

2. GETTING STARTED WITH YOUR FLYTECOMM SYSTEM

This section will discuss the installation and configuration of your FlyteTrax™ Express system to best suit your operational needs. Various alternatives will be discussed and the pros and cons of each will be presented. At the conclusion of this section you should have the information necessary to move forward with your installation.

2.1 SYSTEM REQUIREMENTS

The FlyteTrax™ Express system is capable of running the Windows 95, Windows 98, and Windows NT operating systems. Other operating systems can be supported but requires setup by FlyteComm in order to assure the compatibility with the target operating environment. The specific requirement often depends on the configuration under which you plan to operate the system. Questions to be answered in this area are; (1) Do you want to run it on a single computer as a standalone application? (2) Do you want to run the database build on a server and put the display on a single workstation? (3) Do you want the software to run on a secure server but write the output to a common use disk drive for network use by multiple display stations? (4) Do you want to run the database process and display on one computer and have others network to the traffic directory for multiple display capability?

To begin the discussion let us look at the simplest of installations where both the FTM 2001 and the Trax will operate on a single stand-alone computer. In order to run the entire system on a single computer, we recommend the following minimum hardware configuration to assure optimal system operation:

- 200 MHz Pentium processor or faster
- 128 MB or more RAM
- 800MB of available disk space
- Video card with 2MB or more onboard memory
- CD Drive
- 56Kbps. Modem

NOTE: The FlyteTrax™ Express can be run in a standalone configuration on a system with as little as 32 MB of memory if weather displays are not used. For optimum performance using weather displays 128 MB of memory is required. Attempting to use weather displays with less than 128MB of memory will force the display to a Mercator projection so that the conversion of data to a Lambert Conformal Conic projection will not be required.

In cases where the FTM 2001 and the TRAX software will run on different computers, the following minimum configuration is recommended for the unit that will run FTM 2001:

- 133 MHz Pentium processor or faster
- 32 MB or more RAM
- 600 MB of available disk space
- CD Drive
- 56 KBPS Modem

The following minimum configuration is recommended for computers running TRAX only and receiving data from an FTM 2001 running on another unit:

- 200Mhz Pentium processor or faster
- 128MB or more RAM
- 400 MB of available disk space
- CD Drive
- video card with 2MB or more onboard memory

NOTE: See the note above concerning weather displays.

These requirements assume that the appropriate local area network of your choice will be available for system installations where the FTM 2001 and TRAX are running on separate computers. The minimum network speed should be 10 Mbps.

2.2 COMMUNICATIONS REQUIREMENTS

The type of INTERNET connection can be anything from a dial-up PPP connection (at the low cost end) to a dedicated partial T-1 connection (at the upper end). The different types of connectivity have their pros and cons.

2.2.1 Dial-up PPP Link. This type of connectivity is the least expensive. It can be obtained for as little as \$17.95 per month depending on the locale and the provider. AOL®, CompuServe® or any of the other commercially available providers can also be used. However it should be considered that some of these may have an automatic disconnect in place that will push you off-line after an adapted period of time. Others may have an automatic disconnect if the line goes quiet for an adapted number of minutes. While the FTM 2001 will automatically attempt to reconnect, some data may be lost during the time it takes to re-establish the connection.

2.2.2 Dedicated PPP Link. A dedicated PPP link can cost you an average of \$ 85.00 to \$ 150.00 per month depending on the Internet Service Provider (ISP) chosen. Some ISPs will also bill you for a one-time installation charge. This is usually to cover the cost of the dedicated modem that you will be dialed into at the ISP's location. This type of a connection will not automatically log you off. However, like any INTERNET connection, during busy periods of the day throughput may become slow due to the volume of users on the INTERNET. This can sometimes lead to lost data packets and therefore lost update messages.

2.2.3 Dedicated INTERNET Connection. This solution is fast becoming the most used solution. With the advent of DSL, ADSL, IDSL, and ISDN capabilities, and their acceptable pricing, more and more businesses and many individuals are finding them acceptable. This connectivity assures uninterrupted access to your ISP. However once you get through them onto the open INTERNET, you may experience some latency in data reception during peak traffic periods.

2.3 BEFORE YOU BEGIN

After determining the degree of data reliability necessary to meet your needs, it is time to configure the hardware and prepare to install the FlyteTrax™ Express system.

2.3.1 Internet Connections

- (a) If you are using an INTERNET service provider (ISP) as your primary data connection or as a back-up, open your dialer and insert the dial-up number, user ID, and password into your dialer so that it will dial-up without having to enter the information each time. Be sure to select the box "save password".
- (b) If you have a dedicated ISP line on your computer or network there is nothing you need to configure. The FlyteTrax Express™ will find the connection on its own.
- (c) Place the FlyteTrax™ Express CD in the CD drive. The install program will begin automatically. For a standard installation select all defaults and the system will install itself.

2.4 STARTING FLYTETRAX™ EXPRESS

Installation of FlyteTrax™ Express is automatic. Place the FlyteTrax™ Express CD in the CD reader. The system will automatically begin the installation once you close the drawer. Once the installation is complete you can remove the CD from the reader. Next you must determine how you want to connect to the INTERNET. If you have an ISDN connection or a T-1 or partial T-1 and your computer is on a network the FlyteTrax™ Express software will automatically find the path to the INTERNET when you start it up. If you are using a dialup PPP connection, you will have to be sure that you have connected to the INTERNET prior to starting FlyteTrax™ Express. When FlyteTrax™ Express loads, it will look for the INTERNET connection. Once the software has established connection to the INTERNET, the registration form will appear. Fill out the registration. Once you click OK, the FTM will indicate that it is now downloading a database. This process can take anywhere from 1 to 8 minutes, depending on the speed of your internet connection. Once the database download is complete, you will see flights on your display.

2.5 ENABLING NETWORKING

If you are installing FlyteTrax™ Express to be used on a network, you must make some decisions concerning the location of the FTM 2001 and the “/traffic” directory used to communicate data from the FTM 2001 to FlyteTrax™ Express. Normally, the “/traffic directory” is written in the directory containing FTM 2001. FlyteTrax™ Express is then pointed to the location of this directory and as long as the hard drive containing the “/traffic” directory is mapped to the computer running FlyteTrax™ Express the FlyteTrax™ Express can be told to look for the “/traffic” directory on that mapped drive.

In other cases, you may be running FTM 2001 on a system that you do not want accessed by other users on the network. In that case, you can load FTM 2001 on the secure server and/or drive, and tell FTM 2001 that the “/traffic” directory is located on another mapped server and/or drive. The FTM 2001 will then write the traffic files to the drive you have specified and into the “/traffic” directory that you have provided there. Once FlyteTrax 2001™ is started, you then point it to the location of the “/traffic” directory you have the FTM 2001 writing too.

In either of these cases, you would run the install program and select the program you want loaded on the system you are loading. When you finish loading either the FTM 2001 or the FlyteTrax then you would remove the CD and go to the next machine.

Once you have loaded the flight tracker and flight status tracking components on the machines you intend to use on the network, perform the following.

2.5.1 Starting FTM 2001 for the first time.


- (a) Double click the left mouse button on the “FTM” icon on your desktop.
- (b) When the message “FTM is initializing” appears, click “OK”.
- (c) Fill out the registration form that will appear and click “send”. This will register you with the data server.
- (d) When the FTM 2001 screen appears, click the “Setup Options” button. The “Setup Options” window will appear.
- (e) If you are going to access the traffic directory from the current disk that the FTM is loaded on, this directory will already be displayed in the “Traffic Directory” window. If you are going to access the traffic directory from a different disk, select “browse” to the right of the “Traffic Directory” line and select the network drive and “traffic directory” you have placed on that drive.

- (f) Next, go to the computer that will be displaying FlyteTrax™ Express and double click the “FlyteTrax” icon.
- (g) When the FlyteTrax™ Express screen appears, select the menu item “File” and “Directories”. In the “Traffic Directory” line “Browse” and select the drive and directory where you put the “/traffic” folder. Once you have selected this location, flights should appear on your FlyteTrax™ Express display.

THE FLYTETRAX™ EXPRESS DISPLAY

The FlyteTrax™ Express is a Windows based graphic display capability for displaying the geographic location of airborne IFR air traffic anywhere in the FAA air traffic system. The display can overlay the traffic with a wide selection of mapping such as, geo-political boundaries (as seen below), air traffic control center boundaries, control sector boundaries, low altitude “victor” airways, high altitude jet routes, etc. The display can fill the entire screen or can be sized down to occupy any portion of the screen you desire. The standard Windows™ conventions apply to the FlyteTrax™ Express window. You can hide it, minimize it, or cascade it with other windows. The menu selections follow standard Windows™ conventions as well. Looking at the display you see the menu line below the title bar. The menu pull down as they would with any other Windows™ application. Below the menu bar is the optional button bar for the most commonly used commands. Pressing the button will execute the command or in cases where there are choices to be made, the button will cause the necessary dialog box to be displayed to input the parameters of the request.

NOTE: For flights to appear on the screen, either the “GA” or the “COM” (or both) buttons should be depressed. If neither button is depressed, no flights will appear.

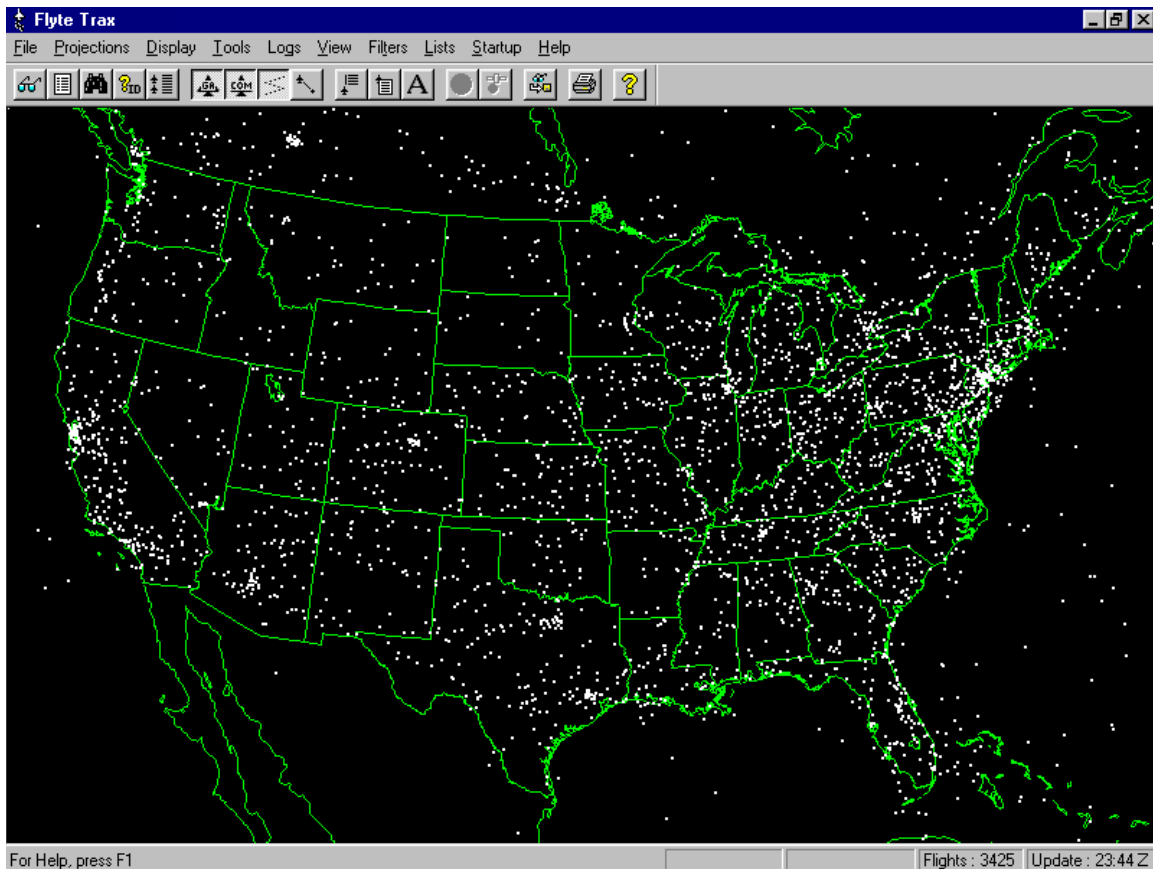


3. NAVIGATING AROUND THE DISPLAY

3.1 ZOOM IN, ZOOM OUT, AND MOVE TO

Zoom In – Zooming is the same as magnifying the display, or moving in for a closer look. To Zoom In on any area, simply place the cursor on the center point of the area to be enlarged and either right click, and then select "Zoom In" from the menu, or press the Z"Z" key after positioning the cursor.


Zoom Out – This is sometimes referred to as unzoom from any area, simply place the cursor on the center point of the area to be displayed and either right click, and then select "Zoom Out" from the menu, or press the Y"U" key (for unzoom) after positioning the cursor.

Move To – The “move to” command changes the center of the display to a new location without magnifying or moving farther away from the current scale of the display. To move to any area, simply place the cursor on the point of the area that will become the new map center point and either right click, and then select "Move To" from the menu, or press the M “M” key after positioning the cursor.

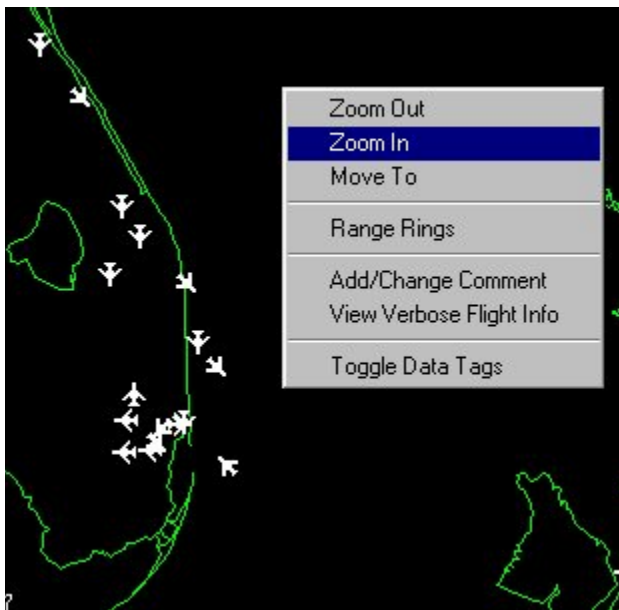

3.2 VIEWPOINTS - This feature is available only in the FlyteTrax 2001 version.


Viewpoints are a fast and convenient way to save a particular view for fast recall. Multiple viewpoints may be saved and recalled at will without having to continually reposition the display through the use of the Move, and Zoom commands.

1. To use viewpoints, select "Viewpoint" from the View menu or click on the Viewpoint  button on the toolbar.
2. To create a viewpoint, set up the display in the desired manner, perform step 1, and then click on the "Add" button. Enter a name for the view when prompted, and then click the "OK" button.
3. To delete a viewpoint, perform step 1, select the desired viewpoint from the list, and click the "Delete" button.
4. To display an existing viewpoint, perform step 1, double click on the desired viewpoint, and then click the "OK" button.

3.3 MAP PROJECTIONS - Some aspects of this feature are available only in the FlyteTrax 2001 version.

FlyteTrax™ offers two different map projections. Those projections are Lambert Conformal Conic Projection, and Mercator Projection. Selections have been setup for either a Lambert Conformal Conic Projection of the US or a Mercator Projection of the US (called “standard” in the menu). Other projections are Atlantic, centered on middle of the Atlantic Ocean; European, centered on Spain; Pacific, centered on the Pacific Ocean; and Polar which is centered on the North Pole.

1. To change map projections, select the desired projection from the Projections menu.

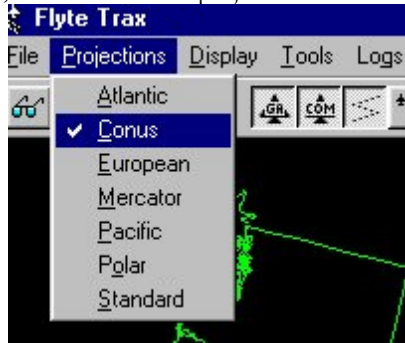

3.4 HOT KEYS - Some aspects of this feature are available only in the FlyteTrax 2001 version.

In addition to the menu and button selections, hot keys are also available for many of the most commonly used functions. The following hot keys are currently defined for display overlays:

- A - ARTCC Boundaries
- B - Map Borders
- H - High Sectors
- J - Jet Routes
- L - Low Sectors
- O - Oceanic Sectors
- P - Pacing Airports
- S - Super High Sectors
- V - Victor Airways
- Y - Runways
- ^ - TRACON Boundaries


The following hot keys are defined to perform these functions:

- D - Redraw Screen
- F - Toggle Flights on/off
- M - Move
- Q - Quit Program
- U - Unzoom
- Z - Zoom
- . - Display Latitude/Longitude on Map
- | - Toggle Data Tags
- @ - Find Flight tracker and flight status
- # - Display Latitude/Longitude in Box

All times used in FlyteTrax™ Express can be displayed in either Universal Coordinated Time (Zulu time) or Local time (12 hour AM/PM) based on your geographic location.

1. To change time settings, select "Time to Use" from the Display menu, and then select "GMT" for Universal Coordinated Time or "Local Time Based on Current Location" for local time.
2. Changing this setting will affect all departure and arrival times, as well as the file update time in the lower right hand corner of the display. The only system not affected by this setting is the Airport Arrival Information display system, which operates independently of the FlyteTrax™ Express graphic display.

3.5 CHANGING FONTS

1. To change the font that is used in all data tags, select "Change Font" from the Display Menu or  click on the Font button on the toolbar.
2. Choose the font, size, and properties, and click on the "OK" button to apply the new settings or click the "Cancel" button to quit.

3.6 DISPLAYING THE TOOL BAR AND STATUS BAR

1. To display or hide the toolbar, select "Toolbar" from the View menu. By default, the toolbar is displayed.
2. To display or hide the status bar at the bottom of the display, select "Status Bar" from the view menu. By default, the status bar is displayed.

3.7 DISPLAY FLIGHT TRACKER AND FLIGHT STATUS DATA

Flights are displayed in one of two ways: either by selecting the "GA" and/or "COM" buttons on the button bar, or by checking "Commercial" and/or "GA flights" in the "Flights" submenu under "Display" on the menu bar.

Commercial flights are all scheduled airline flights and any other aircraft operator who has a designated FAA three-letter operator code. Any charter operator or on demand operator may request and obtain an FAA three letter operator code if he has no less than six operations a day. With an operator code, the aircraft operator then files his flight tracker and flight status plan using his operator code and a 2 through 4-digit trip number that he assigns to the flight tracker and flight status.

GA (or general aviation) flights are those flights that file using their aircraft registration number rather than an operator code. These aircraft are primarily private or company owned aircraft not operating for hire. In some instances, these aircraft owners have requested that their registration number be blocked so that they cannot be identified. In those instances, the data tag with the aircraft will show a call sign of "GA" instead of the registration number.

When flights are displayed on a background in excess of 1000 miles across the screen, the flights will appear as dots. As you Zoom In to less than 1000 miles across the screen, the flights will become small aircraft icons. Each icon will be headed within 20 degrees of the direction the aircraft is flying. Aircraft icons are discussed further on in the manual.

3.8 DISPLAY OVERLAYS - Some aspects of this feature are available only in the FlyteTrax 2001 version.

Display overlays consist of additional mapping options that allow the user to view the positions of flights in relation to those mapped areas. Each overlay may be turned on individually and added to the display of any other overlays.

3.8.1 Areas

To display any of the military, special use airspace, or air traffic control boundary overlays, select "Areas" from the Display menu, and then select the desired overlay.

Viewable overlays include: Alert areas, military operating areas, prohibited areas, restricted areas, warning areas, air route traffic control center boundaries, and airport traffic control boundaries.

3.8.2 Sectors

To display any of the air traffic control sectors, select "Sectors" from the Display menu, and then select the desired sector. Viewable sectors include low, high, super high, and oceanic.

3.8.3 Airways

To display any of the air traffic airways, select "Routes" from the Display menu, and then select the desired airway overlay. Viewable airways include jet and victor routes.

3.8.4 Airports

To display the locations of the top 55 airports, select "Locations" from the Display menu, and then select "Pacing Airports". The identifiers of the airports will be displayed in the location of the airport.

3.8.5 Runways

To display runways, select "Locations" from the Display menu, and then select "Runways". The actual layout of the airport runways will be displayed. To see the layout, it is necessary to zoom in to a level that the layout is visible. At a United States level, the runways appear as a faint blue dot in their respective locations.

3.8.6 Map Borders

1. To display the geopolitical map boundaries, select "Map Borders" from the Display menu.

3.9 RANGE RINGS - This feature is available only in the FlyteTrax 2001 version.

3.9.1 Creating Range Rings

1. To Place range rings anywhere on the screen, right click on any point on the map that will be the center point for the range rings and then select "Range Rings" from the menu.
2. Select the number of rings to be displayed.
3. Select the distance between rings.
4. Select the color of the rings.
5. In addition to serving as distance indicators, range rings can also be used as boundary alarms to detect aircraft or weather within a designated geographic area.
6. When all settings have been completed, click the "OK" button to display the rings or click the "Cancel" button to quit.

3.9.2 Modifying Range Rings

To modify range rings, right click in the center of the ring and then select "Range Rings" again from the menu. When the range ring dialog box appears, make any desired changes, and then click the "OK" button.

3.9.3 Deleting Range Rings

1. To delete range ring or rings, right click in the center of the ring and then select "Range Rings" again from the menu.
2. When the range ring dialog box appears this time, a "Delete" button will be present in the center of the Dialog box. To delete the range rings simply click on the "Delete" button.

3.9.4 Alert Systems

When setting range rings, you have the option of setting alerts for either traffic and/or weather that may come within range of the outermost range ring set.


You may set traffic alerts by placing a check mark in the "Flight tracker and flight status Traffic Alert" box. A traffic alert may be either an "Audible Alert" via the computers speaker, or an "Activate Data Tag". If you select both, you will get the audible alert and the data tag for any flight tracker and flight status that crosses into the range rings.

Weather alerts, when selected, will provide a warning message whenever weather of the selected severity has come within the area bounded by the outermost range ring. For weather alerts to function, the "National Radar Mosaic" image must be turned on.

4. WORKING WITH DATA TAGS

4.1 DISPLAYING DATA TAGS - Some aspects of this feature are available only in the FlyteTrax 2001 version.

4.1.1 Pop-Up

To use the pop-up data tag feature, select "Data Tags" from the Display menu, and then select "Pop-Up Data Tags", or  click on the Pop-up Data Tag button on the toolbar.

When pop-up data tags are activated, data tag information on any flight tracker and flight status can be displayed by running the cursor over the aircraft icon.

4.1.2 Standard

To position and display data tag information on any flight tracker and flight status, left click on the desired flight tracker and flight status and hold the left mouse button down while moving the cursor in the where the data tag is to be placed.

To turn off a data tag, left click on the aircraft icon associated with the data tag.

4.1.3 Toggle All


To toggle data tags on or off for all displayed flights, select "Data Tags" from the Display menu, and then select "Toggle Data Tags", or right click anywhere on the display and select "Toggle Data Tags" from the menu. **Note:** a maximum of one hundred 100 data tags can be displayed at one time.

4.1.4 Viewing Verbose Data Tag Information

1. To view verbose data tag information on any flight tracker and flight status, right click on the desired aircraft icon, and select "View Verbose Flight tracker and flight status Info" from the menu.
2. A dialog box will appear containing the verbose information related to the flight tracker and flight status.
3. To close the box, click on the "Close" button.

4.2 MODIFYING DATA TAGS

The information contained in each data tag can be easily tailored to suit any need.

1. To modify data tag information, select "Data Tags" from the Display menu, and then select "Layout", or click on the  Modify Data Tag button on the toolbar.
2. Each field in the dialog box represents a position in the data tag. All fields may be edited except the aircraft identifier, which is fixed. To modify a field use the pull down box to select the information for each position. To leave a position blank, select the empty line at the top of the pull down list.
3. When all desired fields have been modified, click on the "OK" button to apply the settings or click on the "Cancel" button to quit.

4.3 ADDING COMMENTS TO DATA TAGS

Free form text comments can be added to any data tag using the Data Tag Comment function.

1. To add a comment to any data tag, right click on the desired aircraft icon, and then select "Add/Change Comment" from the menu.
2. In the dialog box that appears, enter the comment to be added to the data tag. If the comment needs to remain with the flight tracker and flight status for another flight tracker and flight status leg after landing, click on the check box marked "Keep after landing".
3. Click on the "OK" button to apply the comment and display it in the data tag, or click on "Cancel" to quit.
4. To delete or change a comment, repeat step 1, and either delete or edit the text. Click on the "OK" button to apply the text change or deletion.

4.4 DISPLAYING AN AIRCRAFTS LAST REPORTED POSITION

To display a flights last reported radar position, select the display last position icon on the tool bar or select the "Display" menu item and select "Last Known Position" from the submenu.

Each flight tracker and flight status will display a trailer line back to a dot depicting the aircraft's position when the last radar track update was received. The flight tracker and flight status modeling algorithms in the software have determined the current location of the aircraft in relationship to the last radar position.



5. WORKING WITH FLIGHTS

There are two target symbologies used in the system.

1. Flat Track – This symbology is displayed when the system is receiving radar track positions at regular intervals. In enroute (or ARTCC) airspace, updates are received at least once every 4 minutes. When this condition exists the target appears as a solid icon as pictured here in the upper right side of the figure below.



2. Coast Track – This symbology is displayed when the system has not received a radar track update in the past 7 minutes. The target is being positioned by dead reckoning based on the last radar position report, the established ground speed at that position report, and the track established by the prior two position reports. The symbol will be a hollow aircraft outline as depicted in the lower left side of the above figure. Once a new radar position is received, the target will again become solid.

5.1 USING THE FLIGHT TRACKER AND FLIGHT STATUS NOTIFICATION SYSTEM - This feature is available only in the FlyteTrax 2001 version.

Range rings can be used as boundary alarms to detect aircraft within a designated geographic area.

1. To use range rings as a flight tracker and flight status alerting system, create a new set of range rings using the instructions in the [Using Range Rings](#) help topic. In the range rings dialog box, click on the check box marked "Audible Alert" in the Flight tracker and flight status Traffic Alert area of the dialog box. By default this option is selected.
2. To display the data tag of a flight tracker and flight status crossing a range ring automatically, click on the check box marked "Activate Data Tag" in the Flight tracker and flight status Traffic Alert area of the dialog box.
3. When all settings have been completed, click the "OK" button to display the rings or click the "Cancel" button to quit.
4. With this function activated, an alarm will sound each time an aircraft passes the outermost ring of a set of range rings, as well as display the data tag of the flight tracker and flight status passing the ring.

5.2 USING THE FLIGHT TRACKER AND FLIGHT STATUS HISTORY FEATURE - This feature is available only in the FlyteTrax 2001 version.

The Flight tracker and flight status History function will display the actual route flown by each aircraft that is displayed. **NOTE: It is not recommended that this function be used unless the host computer contains at least 128MB of memory.**

1. To toggle the Flight tracker and flight status History function on or off, select "Flights" from the Display menu, and then select "Flight tracker and flight status History".
2. The system will display a trailing line with a small circle at each point along the route flown that a radar track update was received.

5.3 FINDING FLIGHTS

1. To find a specific flight tracker and flight status, select "Find Flight tracker and flight status" from the Tools menu, or click on the Find Flight tracker and flight status button on the toolbar.
2. Enter the tail number or airline and flight tracker and flight status number of desired flight tracker and flight status, such as N123 or AAL123 and then click on the "OK" button to search for the flight tracker and flight status or "Cancel" to quit.
3. If the flight tracker and flight status is active FlyteTrax™ will display the aircraft's icon and data tag. If no flight tracker and flight status is found, then a message denoting this will be displayed.


NOTE: If the flight tracker and flight status is not active at the time you select find flight tracker and flight status, the system will store your request for information on the flight tracker and flight status, and once it departs the icon and data tag will appear where ever the flight tracker and flight status departs.

5.4 DISPLAYING AN AIRCRAFTS ROUTE OF FLIGHT TRACKER AND FLIGHT STATUS - This feature is available only in the FlyteTrax 2001 version.

5.4.1 Textually


To display a flight tracker and flight status's cleared route of flight tracker and flight status in the data tag, select "Flights" from the Display menu, and then select "Text Route".

5.4.2 Graphically

To display a flight tracker and flight status's cleared route of flight tracker and flight status graphically on the display, select "Flights" from the Display menu, and then select "Display Route", or click on the Display Route  button on the toolbar.

5.5 LOOKING UP NAMES AND IDENTIFIERS

The lookup capability allows you to see either the name or the identifier of an airport, an airline, or an aircraft type.

1. To lookup an identifier or name, select "ID/Name Lookup" from the Tools menu, or click on the  ID/Name Lookup button on the toolbar.
2. In the dialog box that appears, select the type of lookup. Lookup types include airlines, airports, and aircraft types.
3. To find an identifier, enter the name of the airline, airport, or aircraft, and then click on the "Lookup ID" button.
4. To find a name, enter the identifier of the airline, airport, or aircraft, and then click on the "Lookup Name" button.
5. When finished, click on the "OK" button to quit.

6. WORKING WITH FILTERS

6.1 CREATING FILTERS

1. To create a new filter select NEW from the Filter menu or click the on the filter button on the toolbar.
2. The filter dialog box will appear. Enter information in a field by either using the pull down list or by double clicking in a field box and then typing the desired identifier (all but Altitude and Color fields).
3. Each field is designed to work with the others to select a subset of flights, and multiple filters may be placed together under a single filter name. For example, to display all United Airlines Boeing 767 aircraft flying between 30,000 and 40,000 feet in red that departed Chicago and are arriving in Los Angeles, do the following:
 - A. In the Depart field select ORD from the scroll down list using the methods described above.
 - B. In the Arrive field select LAX.
 - C. In the Operator Code field select UAL for United Airlines.
 - D. In the Aircraft Type field select B767 for Boeing 767 aircraft.
 - E. In the Minimum Altitude field type 300.
 - F. In the Maximum Altitude field type 400.
 - G. Click on the Color box and select the red color box, and then click OK.
 - H. Select OK to display the filter immediately or OK and Save to Disk to save the filter before displaying.

If a second filter is to be added to the first then simply click on the Add New button to display a new filter input dialog box. You may return to the previous filter at any time by clicking on the Previous button at the bottom of the dialog box. To return to the new filter click on the Next button located next to the Previous button. Using this method it is simple to create and navigate through multiple filters saved under one name.

To delete filter pages use the Next and Previous buttons to move to the desired filter and then click the Delete key. All information on the filter page will be deleted and all subsequent filter pages will be moved up automatically.

NOTES

- Flights may be randomly colored by airline when selecting either arrivals or departures only. Selecting this feature (located in a check box underneath the Color box) will automatically color code each flight tracker and flight status icon according to the airline it represents. Using this feature all arrivals can be quickly sorted by airline. To view a color map showing each airline and its corresponding color select Assigned Airline Colors from the View menu. A box will appear in the upper left hand corner of the display depicting each displayed color and its representative airline three letter identifier.
 - Aircraft may be filtered by type or class. When selecting a type, the class field will gray out and vice versa when selecting a class. Class types include Jet, Turboprop, and Piston.
-
- If an identifier for any field is not located in the scroll down list, it may be easily added by using the Add Element function.
 - Multiple filters saved under different names may be displayed at the same time, but precedence ordering will occur. For instance, opening a filter showing all Los Angeles arrivals in red and then opening a second filter showing all United flights in yellow will result in those United flights arriving Los Angeles to be displayed in red, not yellow.
-

- If a filter has been created but not saved at the time of creation, it can be saved at any time in the future by using the Save Filter function.

6.2 MODIFYING FILTERS

1. To modify an existing filter select "New" from the Filter menu or click on the filter button on the toolbar.
2. Each of the entries operates in the filter dialog box with a pull down scroll box except for the altitude box. To enter altitudes type the desired altitude using hundreds of feet. For example, to see all aircraft flying at or below 23,000 feet, leave the "Min Altitude" at 0 and set the "Max Altitude" 230.
3. Placing the cursor on the down arrow of any of the other entries will cause a scroll box with the options available for that entry to be displayed.
4. To make a new selection scroll to the desired entry and click the left mouse button to place that entry on the line. Entries can also be added directly onto the line by placing the mouse on the line and typing the entry. For example, to see all Boston departures type "BOS" in the Departure Airport box. Once "OK" is selected the display will now show only those aircraft whose departure point is Boston.

NOTES

Each item selected within a single filter dialog further refines the filtering for that request. Therefore, two filters must be used when viewing departures and arrivals to/from an airport. Placing the same airport name in one filter in the departure and arrival fields causes the filter to look for all aircraft departing and arriving the same location and thus, will display nothing.

6.3 SAVING FILTERS

1. To save a filter, select "Save" from the Filter menu, or display the filter dialog box using the filter button on the toolbar, and then click on the "OK & Save to Disk" button
2. When the save window appears, type in the desired file name for the filter and then select save. The filter can now be recalled from disk anytime for use or modification.

6.4 DELETING FILTERS

1. To delete a filter file on disk select "Delete" from the Filter menu.
2. A filter file box will appear showing all filters saved on disk in the default directory.
3. Highlight the filter to be deleted and select delete.

6.5 CLEARING FILTERS

To clear a list select "Clear All Filters and Lists" from the Filter menu.

6.6 USING MULTIPLE FILTERS AT THE SAME TIME

1. To create multiple filters that are saved under a single file name for display setup the initial filter.
2. After the first filter has been created select "Next" to display a new filter dialog box to setup an additional filter.
3. Multiple filters may be quickly added by continuing to select "Next" after each filter has been created.
4. After the last filter has been added click on "OK" to set all of the filters built in the string.

NOTES

Remember that whenever a single filter is set, the more options selected within a single filter, the more restrictive the selection of aircraft becomes. Whenever multiple filters are set, each individual dialog box filters from the total number of aircraft in the database regardless of the restrictions placed in a previous filter.

Multiple filters saved under different names can be displayed simultaneously as well by opening each filter from the disk

6.7 ADDING NEW AIRPORTS, OPERATOR CODES, AND AIRCRAFT TYPES

The Add Element command allows you to add new airports, commercial aircraft operators, or aircraft types for future use in filters. These new elements are saved to their respective data files automatically.

6.7.1 Adding a New Airport

1. To add a new airport select "Add Element" from the Filter menu, and then select "Airport".
2. An entry box will appear prompting for an airport 3 or 4 letter ID and name. Both fields must be filled in order to save the new entry.
3. When the entry has been completed click "OK" to add it to the data file or "CANCEL" to abort the entry.

6.7.2 Adding a New Aircraft Type

1. To add a new aircraft type, select "Add Element" from the Filter menu, and then select "Aircraft Type".
2. An entry box will appear prompting for an aircraft ID and class.
3. Enter the FAA designation of the aircraft type and select the appropriate aircraft class.
4. When the entry has been completed click "OK" to add it to the data file or "CANCEL" to abort the entry.

6.7.3 Adding a New Airline Operator Code

1. To add a new airline operator code select "Add Element" from the Filter menu, and then select "Operator Code".
2. An entry box will appear prompting for an airline 3 letter ID and name. Both fields must be filled in order to save the new entry.
3. When the entry has been completed click "OK" to add it to the data file or "CANCEL" to abort the entry.

7. WORKING WITH LISTS

7.1 CREATING LISTS

1. To create a list, select "New" from the Lists menu or click on the List button on the toolbar.
2. To add a tail number, click on the "Add New" button. An edit box will appear prompting you to enter a tail number. After entering the number, click "OK" to add it to the list or "Cancel" to cancel the entry.
3. Tail numbers may be edited at any time by clicking on the tail number with the left mouse button and then clicking on the "Edit" button. To delete a tail number, click on the tail number and then click the "Delete" button.

7.2 MODIFYING LISTS

1. To modify an existing list select "New" from the Lists menu or click on the List button on the toolbar.
2. To add a tail number, click on the "Add New" button. An edit box will appear prompting you to enter a tail number. After entering the number, click "OK" to add it to the list or "Cancel" to cancel the entry.
3. Tail numbers may be edited at any time by clicking on the tail number with the left mouse button and then clicking on the "Edit" button. To delete a tail number, click on the tail number and then click the "Delete" button.

7.3 SAVING LISTS

1. To save a list, select "Save" from the Lists menu, or display the filter dialog box using the list button on the toolbar, and then click on the "OK & Save" button
2. When the save window appears, type in the desired file name for the list and then select save. The list can now be recalled from disk anytime for use or modification.

NOTES

All lists are saved with the file extension ".lst" by default.

7.4 DELETING LISTS

1. To delete a list file on disk select "Delete" from the Lists menu.
2. A list file box will appear showing all lists saved on disk in the default directory.
3. Highlight the list to be deleted and select delete.

7.5 MODIFYING AN EXISTING LIST

1. To modify an existing list select "New" from the Lists menu or click on the List button on the toolbar.
2. To add a tail number, click on the "Add New" button. An edit box will appear prompting you to enter a tail number. After entering the number, click "OK" to add it to the list or "Cancel" to cancel the entry.
3. Tail numbers may be edited at any time by clicking on the tail number with the left mouse button and then clicking on the "Edit" button. To delete a tail number, click on the tail number and then click the "Delete" button.

7.6 OPENING AN EXISTING LIST


1. To use a list that has been saved, select "Open", from the Lists menu.
2. When the list file box appears click the cursor on the list to be opened and select "Open". That list will then be executed.

8. USING THE WEATHER

Weather data in the form of a National Weather Radar Mosaic, and National Cloud Cover Imagery are available on the FlyteTrax™ Express display. The radar mosaic updates once every 15 minutes and consists of 1 kilometer by 1-kilometer resolution depicting 16 levels of liquid precipitation, 16 levels of sleet or mixed precipitation, and 16 levels of snow and ice. The National Cloud Cover Imagery is updated hourly on the half-hour.

NOTE: Although the minimum size system for the display of flight tracker and flight status data is only 32 megabytes of memory, it is recommended that you have at least 64 megabytes and preferably 128 megabytes of memory to display the weather. Systems with less than 128 megabytes of memory may only display the weather on a Mercator map projection.

8.1 DISPLAYING THE NATIONAL RADAR MOSAIC OVERLAY

1. To display the National Radar Mosaic Image select "Weather" from the Display menu and then select "National Radar Mosaic", or click on the  radar mosaic button on the toolbar.
2. If a new image has recently arrived, FlyteTrax will process the file for display. A progress indicator will appear depicting the amount of processing left before the image can be displayed. Once the image has been processed it will be redrawn.
3. To turn off the image repeat step 1.


NOTES

- If no radar mosaic image is available then both the radar mosaic button and associated menu selection will automatically turn gray to denote this.

8.2 VIEWING ASSIGNED RADAR MOSAIC COLORS

1. To view a map of colors associated with the national radar mosaic image select "Assigned Weather Radar Mosaic Colors" from the View menu.
2. The box containing the color map may be moved to any of the screen. To close the box simply click on the window close button (X) in the upper right hand corner of the box.

8.3 DISPLAYING THE NATIONAL SATELLITE CLOUD COVER OVERLAY

1. To display the National Satellite Cloud Cover Image select "Weather" from the Display menu and then select "National Satellite Image", or click on the satellite  cloud cover button on the toolbar.
2. If a new image has recently arrived, FlyteTrax will process the file for display. A progress indicator will appear depicting the amount of processing left before the image can be displayed.
3. Once the image has been processed it will be redrawn. To turn off the image repeat step 1.

NOTES.

- If no satellite cloud cover image is available then both the satellite cloud cover button and associated menu selection will automatically turn gray to denote this.

8.4 USING THE RADAR MOSAIC WEATHER ALERTING SYSTEM

FlyteTrax is equipped with proximity weather alerting system that can detect a user-defined level of precipitation within a specified geographic region.

1. To use the system, select the point that will be used as the region's center, right click the mouse, and select "Range Rings".
2. The range ring dialog box will appear. Enter the number of rings desired, distance between the rings, and ring color. If more than one ring is defined then the outer most ring will be used to calculate an alert.
3. Check the box marked "Weather Alert" to engage the weather alert system, and then choose a threshold level from the pull-down list. The higher the threshold level, the more intense the precipitation level. See the "[View Assigned Radar Mosaic Colors](#)" help topic for more information on viewing precipitation levels and their associated colors.
4. Click OK and the range ring or rings will appear on the display. FlyteTrax will now sound an alert whenever the selected or higher threshold of precipitation occurs within the range ring area.
5. To turn off the alert system right click on the center of range ring or rings and select "Range Rings" from the menu. When the range ring dialog box appears, de-select the "Weather Alert" check box. To remove the range ring completely, click on the button marked "Delete".

NOTES

- The weather radar mosaic image must be turned on in order for the alerting system to work.

9. WORKING WITH LOGS

9.1 LOGGING AIRPORT ACTIVITY - This feature is available only in the FlyteTrax 2001 version.

FlyteTrax™ is capable of logging all arrivals and departures to or from an airport for analysis or other purposes. Logged information includes; Aircraft identifier and flight tracker and flight status number, departure point, arrival point, aircraft type, departure time (if known), and arrival time.

NOTE: All times used in the logs are Universal Coordinated Time (UCT). Therefor you should remember that the day of the week will change prior to midnight of your local time. There for flights arriving, departing, or aircraft operations being logged late in the day, may be on tomorrow's file.

1. To log airport activity, select "Airport Arrival/Departure Log" from the Logs menu.
2. The Airport Activity Log dialog box will appear.
3. Select the airport's identifier from the pull down list. If you are unsure of an identifier, you can use the ID/Name Lookup function to find the correct identifier.
4. Select the type of data to be logged by clicking on the Arrival and/or Departure check boxes.
5. Select the time period, in Zulu time, to log information, or click the Run Continuous check box to capture information continuously.
6. Select the types of flights to log by clicking on the Commercial and/or General Aviation check boxes.
7. Click on the "OK" button to begin logging or click on the "Cancel" button to quit the operation.
8. Each log file is saved in the default installation directory. Log files are closed out at midnight local time each night if the data capture time was set to continuous, and are named Airport_Traffic_MM_DD_YYYY, where DD represents the day, MM represents the month, and YYYY represents the year.

9.2 LOGGING AIRCRAFT ACTIVITY - This feature is available only in the FlyteTrax 2001 version.

FlyteTrax™ is capable of logging the movement of individual aircraft by capturing the departure location and time as well as arrival location and time of each flight tracker and flight status entered into the log.

1. To log the movement of individual aircraft, select "Aircraft Activity Log" from the Logs menu.
2. The Aircraft Activity Log dialog box will appear.
3. Enter the tail numbers of private aircraft or commercial aircraft by clicking on the "Add" button. When entering tail numbers for private general aviation aircraft, be sure to place a "N" at the beginning for U.S. registered aircraft, or a "CF" or "CG" at the beginning for Canadian registered aircraft. For commercial aircraft, enter the airline or operator's 3-letter identifier followed by the flight tracker and flight status number with no spaces, such as AAL123.
4. Continue to add tail numbers until all desired aircraft have been entered.
5. To remove a tail number, select it by clicking once it and then clicking on the "Remove" button.
6. To clear the list of aircraft, click on the "Clear List" button.

7. To use an existing aircraft list currently being displayed, click on the "Use Current List" button. All aircraft in the current list will then be logged.
8. To engage the logging function, click on the "OK" button. To quit the operation, click on the "Cancel Button".
9. Each log file is saved in the default installation directory, and contains 24 hours worth of data. Log files are closed out at midnight local time each night, and are named Aircraft_Log_MM_DD_YYYY, where DD represents the day, MM represents the month, and YYYY represents the year.
10. To disable logging, display the dialog box again using the above steps, and then click on the "Cancel" button or "Clear List" button.

9.3 OPENING LOG FILES - This feature is available only in the FlyteTrax 2001 version.

Log files are saved in the default installation directory as text files. To call-up a log file for printing or to review, perform the following steps:


1. Click on "START" at the lower left of your windows desktop with the right mouse button.
2. Click on "Explore" with the left mouse button.
3. Scroll to "Program Files" on your "C" drive and open it by clicking the mouse on the plus "+" to the left of the Program Files folder.
4. Look for the "FlyteTrax" folder under program files and click on it.
5. In the FlyteTrax folder look for the files named "airport_traffic_" or "aircraft_log_"
6. Select the file you want to open by selecting the date you are interested in.
7. Double click on the file name.
8. A window named "Open With" will appear.
9. Select the program you would like to use to open the log file.

The log file can be opened in any program such as "Notepad", or "Wordpad" to be displayed or printed. You may also open it in "MSWord" if you so desire. In addition, you can import the file into a spreadsheet or a database program so you can sort or filter the data as you may desire. Simply follow the "import" data instructions for the program that want to load the data into.

10. DISPLAYING TEXT INFORMATION

10.1 FLIGHT TRACKER AND FLIGHT STATUS DISPLAY LIST

The flight tracker and flight status display list provides a textual listing of all aircraft currently being displayed graphically. Displayed fields include: Aircraft identifier and flight tracker and flight status number or tail number, departure point, arrival point, aircraft type, and arrival time. Data may also be sorted automatically by clicking on any title bar in the display window.

1. To view the displayed flight tracker and flight status information textually, select "List of Displayed Flights" from the View menu or  click on the Flight tracker and flight status List Display button on the toolbar.
2. To print the list, select "Print" from the File menu in the Flight tracker and flight status List Display box.

10.2 AIRPORT ARRIVAL INFORMATION DISPLAY - This feature is available only in the FlyteTrax 2001 version.

In addition to a graphical display, FlyteTrax also contains a textual Airport Arrival Information display that may be manipulated independently of the graphical display. This display may be used to view individual aircraft arriving multiple airports, or all aircraft arriving one or more airports. All arrival times are updated once per minute, and the display window may be resized to suit any individual need.

1. To use the Airport Arrival Information display, select "Airport Arrival Information" from the View menu.
2. The Airport Arrival Information dialog box will appear on top of the Airport Arrival Information display window.
3. To add an airport or individual aircraft, click on the "Add Aircraft or Airport" button.
4. In the "Flight tracker and flight status to Add" dialog box, select either the airport or aircraft of interest, then click the "OK" button to add, or the "Cancel" button to quit. This process may be repeated as many times as necessary.
5. Once all aircraft or airports have been entered, select the time display format and type of aircraft if viewing all arrivals to one or more airports.
6. The data may be sorted up to 3 levels by multiple categories by selecting each category in the "Sort By" area.
7. Data may also be sorted automatically by clicking on any title bar in the Airport Arrival Information display window.
8. To save a selection to disk, click on the "Save to Disk" button. FlyteTrax will default to the install directory for file saving, and will automatically append the file extension ".arr" to the file name.
9. To restore a file, click on the "Restore from Disk" button, and select the desired file using the Windows file browser box.
10. To print the listing of flights, select "Print" from the File menu in the Airport Arrival Information window.

11. PRINTING

11.1 PRINTING THE GRAPHIC DISPLAY

1. To print the FlyteTrax™ graphic display, select "Print" from the File menu, or click on the Print button on the toolbar.
2. To choose a printer, select "Print Setup" from the File menu.
3. To view a preview before printing, select "Print Preview" from the File menu.

11.2 PRINTING TEXTUAL INFORMATION

1. Selecting the "Print" key in the text window performs the printing of textual information. The default printer will be utilized for printing.

12. SAVING AND PLAYING BACK DATA - This feature is available only in the FlyteTrax2001 version.

12.1 ENABLING FILE COLLECTION IN THE FLIGHT TRACKER AND FLIGHT STATUS TABLE MANAGER (FTM2001)

FlyteTrax is capable of archiving and replaying captured flight tracker and flight status information for analysis, as well as many other purposes. To use this function, the Flight tracker and flight status Table Manager database program (FTM 2001) must be set up to capture data.

1. To capture flight tracker and flight status data, go to the Windows Task Bar and maximize the FTM 2001 dialog box if the program is running. If FlyteTrax is being used in network mode, then the computer running the FTM 2001 program must be accessed.
2. Select "Data Capture" from the File menu.
3. A dialog box will appear prompting for file capture location and total number of minutes to continuously capture.
4. Select the directory to save the flight tracker and flight status data in using the Windows file browser box. By default, the data will be placed in the same directory where database files are currently being written.
5. Select the total number of minutes of data to capture. By default, the FTM 2001 writes a new file once per minute. The average size of each file is approximately 1MB, so available disk space should be calculated before setting this option.
6. Click the "OK" button to apply the settings and begin capturing data or the "Cancel" button to quit the function without initiating data capture.

12.2 PLAYING BACK DATA USING FLYTETRAX 2001™

Flight tracker and flight status data that has been captured using the Flight tracker and flight status Table Manager database program (FTM 2001) can be played back at any time from any FlyteTrax display.

1. To play back captured flight tracker and flight status data, select "Playback" from the View menu in FlyteTrax.
2. The playback dialog box will appear.
3. Select the drive and directory containing the captured flight tracker and flight status data. The directory pull down box may be used multiple times to select subdirectories. For instance, when the C drive is selected along with the Program Files directory, viewing the directory listing again will yield all directories contained under the Program Files directory. To select the default location, first select the C drive, and then select the Program Files directory, and then the FlyteTrax directory, and finally the Traffic directory.
4. Select the date of the data to be played back if different from the current day by using the pull down calendar in the "Playback Date" box.
5. Select the start time and end time of the data to be played back, in Zulu time. By default, if no times are selected, FlyteTrax will look for the earliest file and play back all subsequent data files.
6. Select the file display time in seconds. This is the rate that the files are displayed. Selecting 1-second intervals means that 60 minutes of data will be played back in 60 seconds. Using this feature, it is possible to play back a large number of data files in a short period of time.
7. Select the "OK" button to apply the settings and begin playing back data or the "Cancel" button to quit the operation.
8. Data will be played back continuously until the last data file has been reached. To repeat the playback, simply select "Playback" again from the View menu and repeat the above steps.

13. USING THE TAILNUMBER ALIAS FEATURE - This feature is available only in the FlyeTrax 2001 version.

The tail number alias feature is designed for those aircraft owners or operators who have elected to have their tail numbers blocked through National Business Aviation Association's (NBAA) BARR program, but would like to view them using the FlyeTrax display. To use this feature, FlyteComm must first be contacted to provide the code numbers that are assigned to each aircraft that is to be viewed.

13.1 ADDING TAILNUMBERS

1. To add a tail number alias, select "Tail number Alias" from the Tools menu.
2. Enter the tail number to display.
3. Enter the current tail number as provided by FlyteComm.
4. Click on the "OK" button to apply the changes, or click on the "Cancel" button to quit.

13.2 EDITING TAILNUMBERS

1. To edit a tail number alias, select "Tail number Alias" from the Tools menu.
2. Tail numbers may now be edited.
3. When finished, click on the "OK" button to apply the changes, or click on the "Cancel" button to quit.

13.3 DELETING TAILNUMBERS

1. Select "Tail number Alias" from the Tools menu.
2. Click on the tail number to be deleted and then click on the "Delete" key.
3. When finished, click on the "OK" button to apply the changes, or click on the "Cancel" button to quit.

. USING THE WEATHER.....	27	Instrument Flight tracker and flight status	
Adding a New Aircraft Type.....	24	Rules.....	5
Adding a New Airline Operator Code.....	24	Internet Connections.....	9
Adding a New Airport.....	24	Internet Users.....	9
Adding Tail numbers.....	35	Last Known Radar Position.....	19
air traffic controller.....	5	Logging Aircraft Activity.....	29
Airport Arrival Information Display.....	31	Logging Airport Activity.....	29
Alert Systems.....	17	Looking up Names and Identifiers.....	21
Changing Fonts.....	15	Map Projections.....	14
Clearing Filters.....	23	Modifying an Existing List.....	25
Coast Track.....	20	Modifying Data Tags.....	18
Comments to Data Tags.....	18	Modifying Filters.....	23
COMMUNICATIONS REQUIREMENTS.....	8	Modifying Lists.....	25
Creating Filters.....	22	Modifying Range Rings.....	16
Creating Lists.....	25	Move To.....	13
Creating Range Rings.....	16	Multiple Filters.....	23
Deleting Filters.....	23	National Satellite Cloud Cover.....	27
Deleting Lists.....	25	Opening an Existing List.....	26
Deleting Range Rings.....	16	Opening Log Files.....	30
Deleting Tail numbers.....	35	ORIGIN OF THE FLIGHT TRACKER AND FLIGHT	
Display flight tracker and flight status data.....	15	STATUS DATA.....	5
Display overlays.....	15	Printing Textual Information.....	32
Displaying an Aircraft's Route of Flight tracker		Printing the Graphic Display.....	32
and flight status.....	21	Satellite Connections.....	9
Displaying Data Tags.....	18	Satellite Users.....	10
Displaying the tool bar and status bar.....	15	SAVING AND PLAYING BACK DATA.....	33
Editing Tail numbers.....	35	Saving Filters.....	23
ENABLING NETWORKING.....	11	Saving Lists.....	25
Enroute air traffic control.....	5	STARTING FLYTETRAX™ EXPRESS.....	9
Finding Flights.....	21	SYSTEM REQUIREMENTS.....	7
Flat Track.....	20	TAILNUMBER ALIAS FEATURE.....	35
Flight tracker and flight status Display List.....	31	Terminal air traffic control.....	5
Flight tracker and flight status History Feature		THE FLYTETRAX™ EXPRESS DISPLAY.....	12
.....	20	time format.....	14
Flight tracker and flight status Movement		Verbose Data Tag.....	18
Messages.....	5	Viewpoints.....	13
Flight tracker and flight status Notification		Visual Flight tracker and flight status Rules.....	5
System.....	20	Weather Alerting System.....	28
FlyteTrax™ EXPRESS.....	5	Zoom In.....	13
FTM 2001.....	5	Zoom Out.....	13
Hot Keys.....	14		